MILK COOLERS
FOR COFFEE MACHINES



FG10 DGT series are equipped with a digital thermostat, which, combined with the stainless steel sensor, allows to get an exact milk temperature control.

OPTIONAL

MILK LEVEL SENSOR

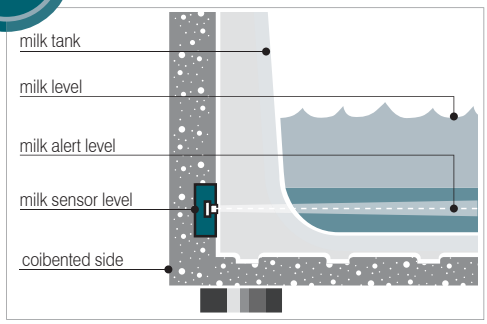

The capacitive milk level sensor is able to detect the milk presence inside the milk box and send an alert signal to the digital thermostat.

On request, it's also possible to provide the "empty signal" directly to the electronic thermostat of the fridge.

The FG10i DGT Chill & Cup Warmer is also equipped with a stainless steel top "cup warmer" shelf for 17+17 units.

	Volume	Net weight	Power supply
FG10i	lt. 7,5	kg. 12	220-240V/50Hz 220V/60Hz (*)
FG10i DGT	lt. 7,5	kg. 14	220-240V/50Hz 220V/60Hz (*)
FG10i DGT Chill&CW	lt. 7,5	kg. 17	220-240V/50Hz 220V/60Hz (*)

(*) optional 115V - 60Hz

a	b	h	c	d	e
462	225	344	163	173	272
462	225	392	163	173	272
462	225	425	163	173	272

dimensions (mm.)



FG10
SERIES

Included
4.0 lt.
a= 160
b= 173
h= 219





FG10i DGT Chill&CW

OPTIONAL

17P + 17P





FG10i



FG10i DGT

OPTIONAL

VITRIFRIGO
COOL AND BEYOND