ECOSMART

Programmable push button and tap dispense atmospheric water boilers

FEATURES

Ecoboiler performance
Programmable portion dispense
Variable height options on push button
Operator adjustable temperature
Programmable pulse feature on push button
Electronic control
Easy to read LCD Panel
Live temperature readout
Filter change flag
316L stainless steel tank



PB10


OPTIONS



PB10 Hi Deck



T10

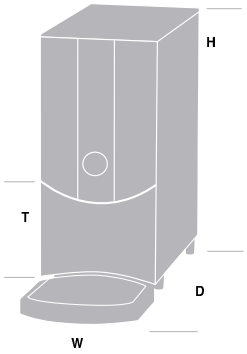

Ideal for catering or self-service applications with variable, transparent temperatures and user control.

Ecosmart	Order Code	Immediate Draw Off	Output Per Hour	Cups Per Hour	Dimensions (DxWxHmm)	T(mm)	Power @230V	Weight (kg)	Packing (mm) Dimensions	Qty Pallet	Plumbing Requirements
Ecosmart PB10	1000677	10.0L	28.0L	156	464x210x590	130	2.8kW	14.5	310x470x840	14	3/4" BSP
Ecosmart PB10 Hi Deck	1000678	10.0L	28.0L	156	464x210x675	215	2.8kW	14.5	310x470x840	14	3/4" BSP
Ecosmart T10	1000674	10.0L	28.0L	156	505x210x590	185	2.8kW	12.5	290x690x560	18	3/4" BSP

NSF/ANSI 4

c UL us LISTED