EVERSYS
swiss espresso systems

e4 & e4m



- 56 cm in width.
- 350 products per hour.
- 4 espresso/cappuccino at the same time.
- Modular servicing.

e4



e4m



TECHNICAL DATA

Productivity

Coffee		350 espresso/hour (23s extraction time)
Steam		Continuous steam supply
Hot Water	&	150 hot water units/hour (2.0dl hot water portions)
milk system	or	350 Cappuccino/hour

Technical data

Brew chamber	2 x up to 24 g. Reverse gravity extraction system
Grinding system	2 x super drive Ø64 mm ceramic grinder burrs
User Interface	2 x 8" Colour Touch screens to create bespoke products
Beans hopper	2 x 1.5kg
Coffee spout height	65...185mm
Interface	USB, SD-Card, Ethernet, Serial, RS-232, CCI (24VDC, 15W)
Standby mode	less than 2W
Boiler size (China Market only)	Total boiler size 11.7l

Design

Dimensions	560 x 600 x 713mm (WxDxH), 840 x 600 x 713mm (WxDxH) with fridge
Weight	≈ 90 kg, 94 kg with fridge
Lighting (Front)	Full colour LED, colour gradient adjustable

Connection

Power requirement	Single-phase 1 x 220 - 240V, 1L-N-PE, 30A, 50/60Hz Two-phases 2 x 115V 110 - 120V, 2L-PE, 30A, 50/60Hz Three-phases 3 x 220 - 240V, 3L-N-PE, 16A, 50/60Hz
Water	Stainless steel braided hose l=2m with screwcap G3/8", 0 - 4 bar, self priming up to 1m
Drain	Drain hose ø23mm, l=2m
Water quality	Total hardness: 5 - 8°dH / Carbonate hardness: max. 6°KH / pH value: ideal 7.0 - 7.2

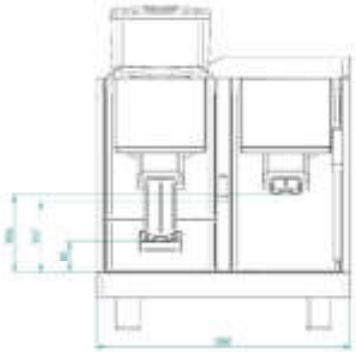

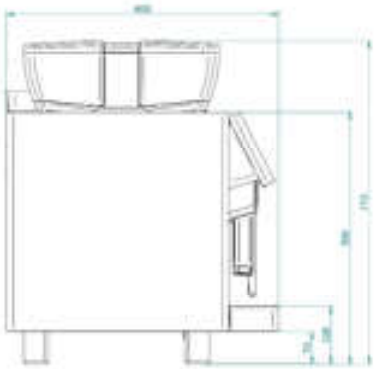

Options

or + Cup heater

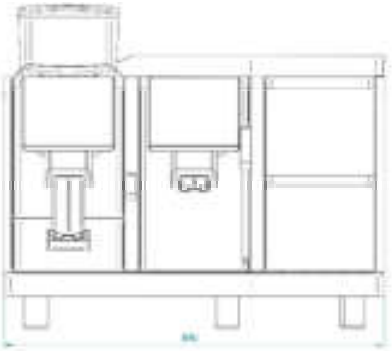

Cup heater standalone



+ Fridge

