EVERSYS
swiss espresso systems

e2 ct



- 28 cm in width.
- 175 espresso/hour.
- 2 Coffee grinders.
- Coffee/tea production.

e2 ct



TECHNICAL DATA e2ct

Productivity

Coffee	175+ espresso/hour (23s extraction time)
Hot Water	or 120 hot water units/hour (2.0dl hot water portions)

Technical data

Brew chamber	1 x up to 24 g. Reverse gravity extraction system
Grinding system	2 x super drive Ø64 mm ceramic grinder burrs
User Interface	1 x 8" Colour Touch screens to create bespoke products
Beans hopper	2 x 1.5kg
Coffee spout height	65…165mm
Interface	USB, SD-Card, Ethernet, Serial, RS-232 CCI (24VDC, 15W)
Standby mode	less than 2W

Design

Dimensions	282 x 600 x 713mm (WxDxH)
Weight	≈ 60 kg
Lighting (Front)	Full colour LED, all colours and colour gradient adjustable

Connection

Power requirement	Single-phase 1 x 220 - 240V, 1L-N-PE, 16A, 50/60Hz Two-phases 2 x 110 - 120V, 2L-N-PE, 16A, 50/60Hz
Water	Stainless steel braided hose l=2m with screwcap G3/8'', 0 - 4 bar, self priming up to 1m
Drain	Drain hose ø23mm, l=2m
Water quality	Total hardness: 5 - 8°dH / Carbonate hardness: max. 6°KH / pH value: ideal 7.0 - 7.2

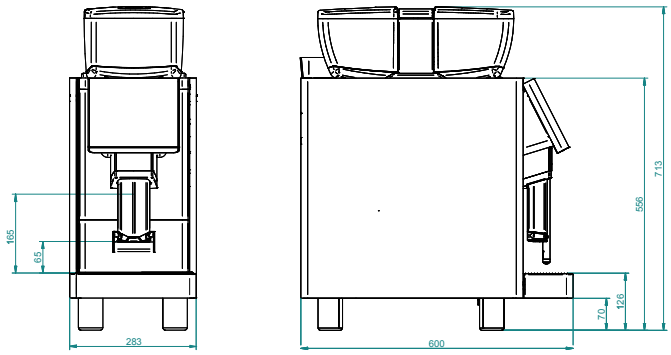

Options

e2ct + Cup heater

