VERSYS
swiss espresso systems

e2 & e2m



- Vertical brew chamber.
- Twin ceramic grinders.
- Genuine barista-style espresso
- Automatic cleaning.

e2



e2m



TECHNICAL DATA

Productivity

Coffee	175+ espresso/hour (23s extraction time)
Steam	Continuous steam supply
Hot Water &	150 hot water units/hour (2.0dl hot water portions)
milk system	175+ Cappuccino/hour

Technical data

Brew chamber	1 x up to 24 g. Reverse gravity extraction system
Grinding system	2 x super drive Ø64 mm ceramic grinder burrs
User Interface	1 x 8" Colour Touch screens to create bespoke products
Beans hopper	2 x 1.5kg
Coffee spout height	65…165mm
Interface	USB, SD-Card, Ethernet, Serial, RS-232, CCI (24VDC, 15W)
Standby mode	less than 2W
Boiler size (China Market only)	Total boiler size 10.1l

Design

Dimensions	560 x 600 x 713mm (WxDxH), 840 x 600 x 713mm (WxDxH) with fridge
Weight	≈ 83 kg, 87 kg with fridge
Lighting (Front)	Full colour LED, all colours and colour gradient adjustable

Connection

Power requirement	Single-phase 1 x 220 - 240V, 1L-N-PE, 30A, 50/60Hz Two-phases 2 x 115V 110 - 120V, 2L-PE, 30A, 50/60Hz Three-phases 3 x 220 - 240V, 3L-N-PE, 16A, 50/60Hz
Water	Stainless steel braided hose l=2m with screwcap G3/8", 0 - 4 bar, self priming up to 1m
Drain	Drain hose ø23mm, l=2m
Water quality	Total hardness: 5 - 8°dH / Carbonate hardness: max. 6°KH / pH value: ideal 7.0 - 7.2

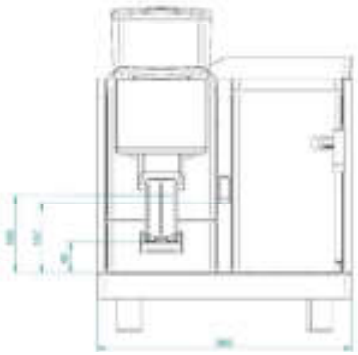

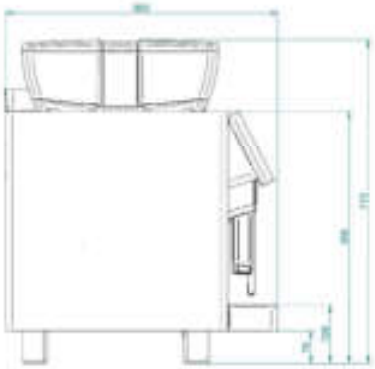

Options

or + Cup heater

Cup heater standalone

+ Fridge

