Electrolux

Ice Cuber
24kg/24h with 6kg bin - Water cooled

ITEM #

MODEL #

NAME #

SIS #

AIA #



Ice Cuber

24kg/24h with 6kg bin - Water cooled

730538 (FGC24W)	Ice maker, cube, 24 kg/24h, self-contained, 6kg ice collection bin included, water -cooled

Short Form Specification

Item No.

Plastic flap on the front, top and sides in 304 AISI stainless steel. The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to remove, permit a simple flow and prevent limestone formation. R404a refrigerant. Water cooled. Container capacity Kg: 6

Main Features

- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Metal spray arms removable without the use of tools.
- Model available in water-cooled version.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.

Construction


- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Easy access to the main components for maintenance.
- Stainless steel spray arms removable without the use of tools.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Refrigerant type: R404a.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.

APPROVAL:


Electrolux
Ice Cuber
24kg/24h with 6kg bin - Water cooled

Ice Cuber
24kg/24h with 6kg bin - Water cooled

Front

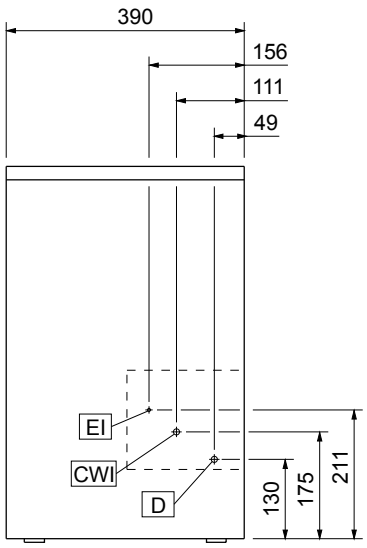


Top

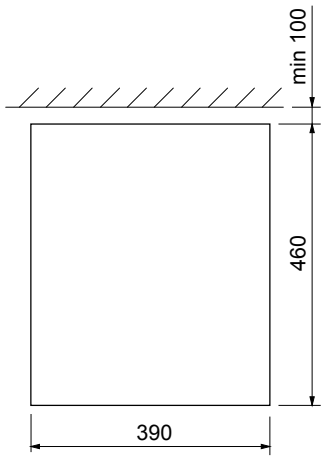

CWI1 = Cold Water inlet 1
D = Drain
EI = Electrical connection

Side

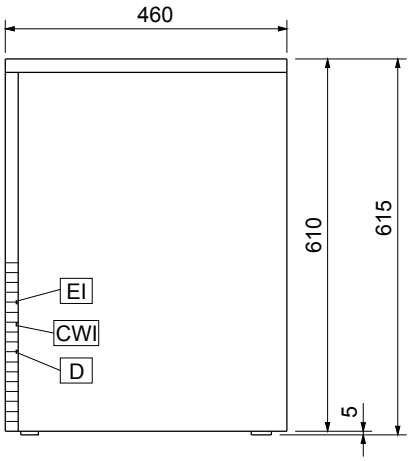

Electric

Supply voltage:	
730538 (FGC24W)	220-240 V/1N ph/50 Hz
Electrical power:	0.35 kW

Capacity:

Bin capacity:	6 kg

Key Information:

External dimensions, Height:	615 mm
External dimensions, Width:	390 mm
External dimensions, Depth:	460 mm
Net weight:	35 kg
Output:	24 kg/day

Refrigeration Data

Refrigerant type:	R404a

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.03.01