Scotsman®
Ice Systems

MF 68
SPLIT

Other models in this range:
MF 46 - MF 56 - MF 58 Split
MF 66 - MF 68 SPLIT
MF 86 - MF 88 SPLIT

Modular Super-Flake Ice Machine up to 1220 Kg








Stainless Steel


Electronic Controls


2xMF 68 Split+UBH1100
(sold separately)


2xMF 68 Split+UBH1600
(sold separately)


2xMF 68 Split+UBH2250
(sold separately)


2xMF 68 Split+SIS1350
(sold separately)


MF 68 Split+RBCSTAND
(sold separately)

This product qualifies for the following listings:

Features

- Modular Superflake ice machine, production up to 1,220 kg in 24 hours
- Split unit, supplied with evaporator only, needs to be connected to remote condensing unit or central cooling system (low temperature)
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings.
- Double protection – electronic rotation sensor and drive coupling -on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- ABS plastic top cover.
- Reduced height to ease installation.

Optional Features (special order):

- UV lamp for bacterial control.
- Anti-scale, anti-algae water filtration system.

MF 68 Split Technologies

CoAxial Flake-ice Evaporator
Total Hygiene Concept
Low Water Content
AgION ANTIMICROBIAL

	24h			
	10°: 10°C		21°: 15°C	
	[kg]	[lbs]	[kg]	[lbs]
MF 68 Split	1220	2690	1170	2578



[WxDxH mm]
538x663x790

[WxDxH inches]
213/16" x 261/8"x 311/8"

[v/Hz/ph]
230/50/1

R 404 A


Residual water content 15%

Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

2 Years Warranty
Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

9/2012

Scotsman
Ice Systems

MF 68
SPLIT

Other models in this range:
MF 46 - MF 56
MF 66 - MF 68 SPLIT
MF 86 - MF 88 SPLIT

Modular Super-Flake Ice Machine up to 1220 Kg

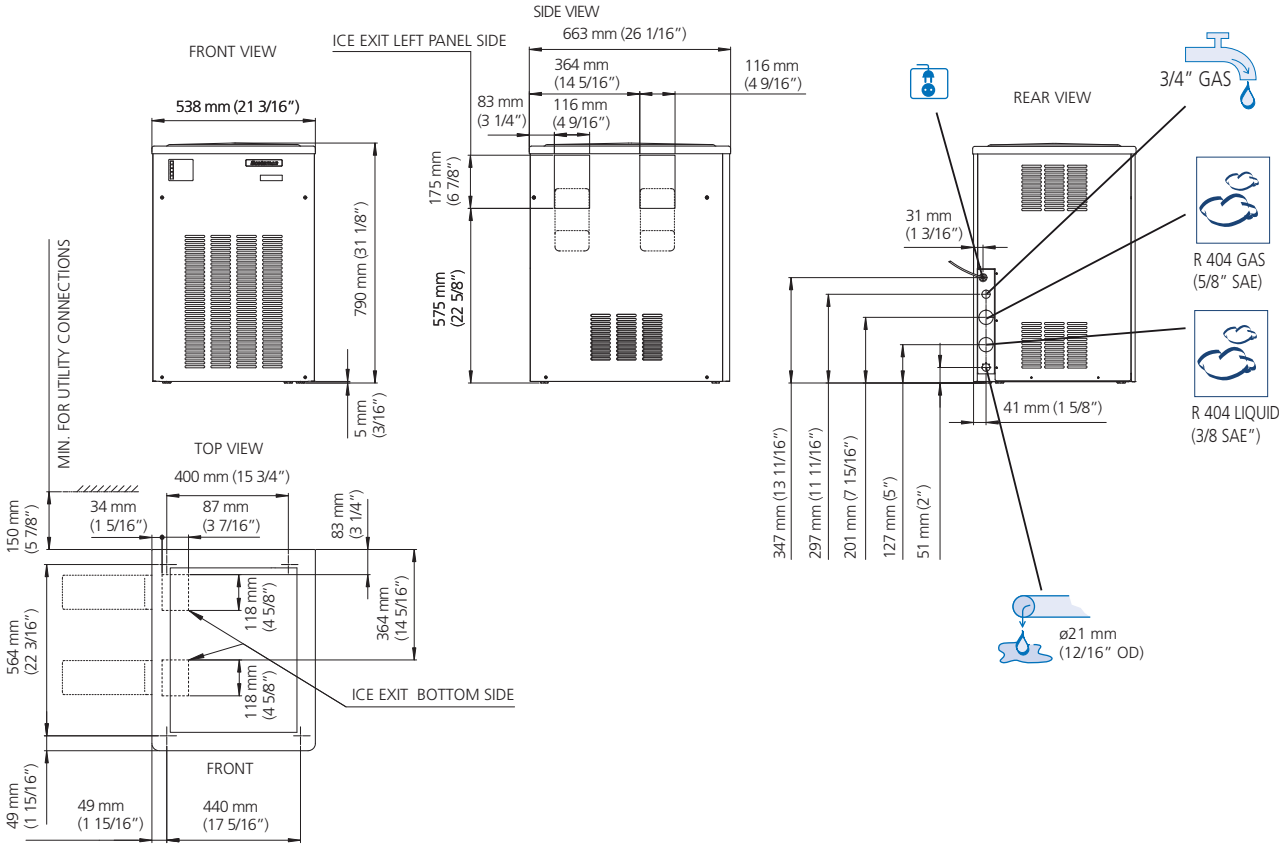

MF 68 SPLIT

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10-38°	1220	1170	1100	900	kg
50-100°	2690	2579	2425	1984	lbs

24h

	Minimum	Maximum
	10°C (50°F)	40°C (104°F)
	5°C (41°F)	35°C (95°F)
	-10%	+10%
	1 BAR 14 psi	5 BAR 70 psi

	R404A/R507 (T. ev: -16°C or 3,2°F; T. cond. +40°C or 104°F)							
	[W]	[Btu/h]	[W]	[A]	[kg]	[lbs]	[kg]	[lbs]
MF 68 Split	4600	15686	400	1,4	98	216	107	235

Scotsman
Ice Systems

9/2012

Europe
Scotsman Europe-Frimont S.p.A.
Ph/Fax +39-0293960208 / 0293960201
scotsman.europe@frimont.it
Paolo Moro

Middle East & N. Africa
Scotsman-Frimont Regional Office (MEnA)
Ph/Fax +97-16 5262944 / 165262946
m.dawood@frimont.ae
fernando.m@frimont.ae

Asia and Pacific
Scotsman Industries (S) PTE. L.T.D.
Ph/Fax +65-67385393 / 67381959
scotsman@scotsman.com.sg
Andrea Tronci

South Africa
Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd
Ph +27-0105900609 / 0877200245/6/7/8
Fax: +27-118264123 / 0866340803
stuart@scotsmansa.co.za - jennifer@scotsman.co.za

India
Scotsman Group India
Ph/Fax : +91-1244002459 / direct 9560072459
david.owen@scotsman.com.sg

Spain
Scotsman España, S.L.U. c/ Galapagar, 12
Ph/Fax +34-911109796 / 916337423
scotsman@scotsman-espana.es
Daniel Doblado

China
Scotsman Ice Systems (Shanghai)
Ph/Fax : +86-2161313200 / 2161313330
scotsman.shanghai@scotsman-china.com
Andrew Clayton