SCN25

19 kg Self-contained Ice Cuber

Other models in this range: SCN35 - SCN45 - SCN75 - SCN125 - SCN215

Technical Features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a



24 Hour Ice Production - 10°C/10°C

Air Cooled	19 kg	No. of cubes 950
Water Cooled	19 kg	No. of cubes 950

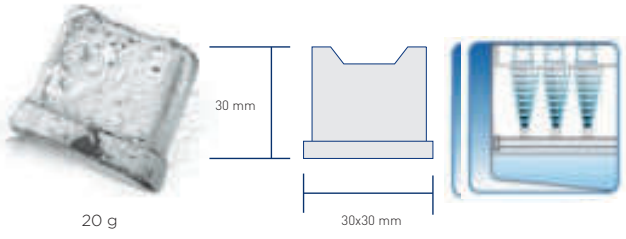

Bin Capacity

kg 6

Warranty

3 years warranty on components

Voltage

230/50/1 standard version

220-240/60/1 on demand



Technology and Certifications

Certified ISO 9001:2008
TOTAL QUALITY

MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg

www.simag.it

10/2015

SCN25

19 kg Self-contained Ice Cuber

Other models in this range: SCN35 - SCN45 - SCN75 - SCN125 - SCN215

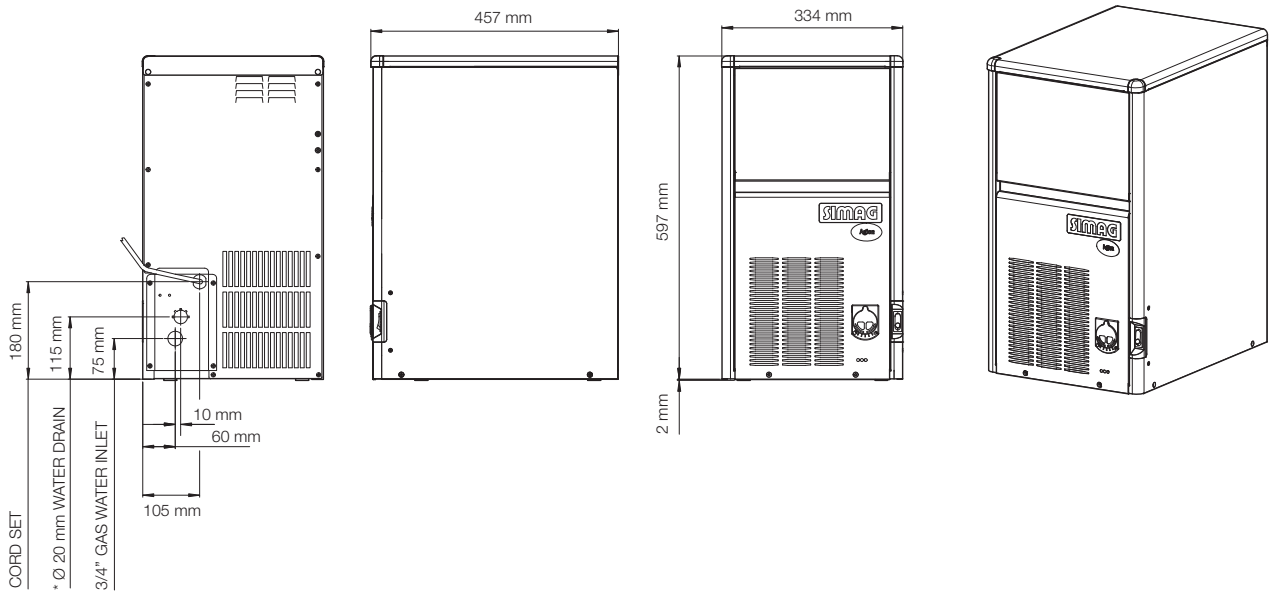

* DRAINAGE PER GRAVITY



EVAPORATOR THERMOSTAT REGULATION



CONTROL BOARD



MAIN SWITCH
New embedded main switch



VENTILATING LOUVERS
New ventilating louvers in water cooled version



TOP ANGLE
New top plastic round corners

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant Charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SCN 25 AS	230/50/1	330	R134a	0,17	10	2,3	28	n.a.
SCN 25 AS	220-240/60/1	360	R134a	0,17	10	3,5	28	n.a.
SCN 25 WS	230/50/1	310	R134a	0,18	10	26	28	n.a.
SCN 25 WS	220-240/60/1	n.a.	R134a	n.a.	10	n.a.	28	n.a.

(*) Power Input: at 43°C Ambient Temperature
(**) Water Consumption: at 32°C Air and 21°C Water

10/2015