Convotherm OES 6.06 mini mobile

6 x 2/3 GN Tray Electric Combination Oven Steamer

- Advanced Closed System - automatic moisture regulation, energy-efficient
- Press&Go - easy to use for perfect results
- Requires minimum space - fits anywhere, saving expensive floor space
- Multi-purpose engaging frame - flexible use, various GN sizes
- Fume reducer - minimal steam in the kitchen
- 3-phase/alternating current - select when installing



Standard Features

- Crisp&Tasty (multi-level demoisturising)
- Multi-point core temperature sensor
- Double glass doors with integrated door lock position and self—emptying condensate drip tray (door drip tray)
- Tray Timer (time-delayed loading for each level)
- Menus and icons make the appliance easy to operate
- Bright graphic interface with full-text display
- Digital dial for easy adjustment of temperature, time and core temperature
- Preselect start time in real-time mode
- Programme up to 250 recipes with up to 20 steps each
- CONVOTHERM Cookbook with pre-programmed recipes
- Cook & Hold and Delta-T cooking
- RS 232 interface
- Stores all device settings and recipes in an additional memory module (ID module)
- Robust stainless steel design
- Zero-wear door contact switch
- Removable engaging frame and suction plate
- Hygienic plug-in gasket
- Condensate drip tray on appliance
- Oven light with shockproof glass cover
- Perpetual self-diagnosis for error recognition
- Emergency programme mode: Appliance can be operated with restricted functionality even when technical malfunctions arise
- Detailed documentation, spare parts lists and circuit diagrams
- IPX 4 spray guard
- Rotary lever door lock with slam function
- Hand shower
- Injector version

Options

- EasyToUCH operating panel with touch screen display
- HACCPViewer - including USB stick for exporting data
- easyRecipe - including USB stick for exporting data
- Left-hinged version
- Special voltage levels
- ConvoClean Automatic Cleaning System

Cooking programmes

Steaming at 30°C-120°C
- For steaming, stewing and poaching.

Superheated steam 100°C-250°C
- For roasting and baking.

Convection 30°C-250°C
- For grilling, quick roasting, baking, toasting and gratinating.

Regeneration 120°-160°C
- For fast heating of prepared dishes pre-arranged on the plate or platter.

Optional Accessories


- Oven stand
- Baking sheets / pans

ATS 5200.101
LIC. 60015
AGA


Convotherm OES 6.06 mini mobile

6 x 2/3 GN Tray Electric Combination Oven Steamer


Front view



View from above with wall clearances

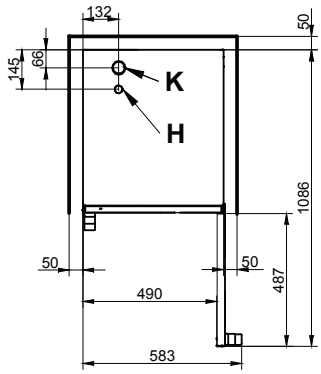

Connection positions in appliance floor



A Drinking water drawer
B Wastewater drawer
D Electrical connection
E Equipotential bonding
H Air vent
I Ventilation port

DIMENSIONS	
Width	515 mm
Depth	599 mm
Height	732 mm
Weight	54 kg
PACKED DIMENSIONS	
Width	580 mm
Depth	740 mm
Height	935 mm
Weight (including cleaning system)	66 kg
Safety clearances	
Rear	50 mm
Right	50 mm
Left (larger recommended for servicing)	50 mm
Top (for ventilation)	500 mm

INSTALLATION REQUIREMENTS
Appliance must be installed on the level
Do not install the appliance near, above or below a source of heat or near flamable surfaces

LOADING CAPACITY	
Shelf distance	50mm
GN 2/3 shelves (40mm deep)	6
ELECTRICAL SUPPLY	
IN ~ 230-240V ~ 50/60Hz (1P+N+E) or	
3N ~ 400-415V ~50/60Hz (3P+N+E)	
Connected load	3.0 kW
Rated current	13.1 A

Fit main switch (all-pin-circuit-breaker) on site, in close proximity to the appliance.
Connection for potential compensation.

WATER CONNECTION
Water drawer
Capacity to hold 5.5l

WATER QUALITY	
Drinking water	
Overall hardness	70-125 ppm
Properties	
pH	6.5 - 8.5
Cl- (chloride)	max. 60 mg/l
Cl_2 (free chlorine)	max. 0.2 mg/l
SO_4^{2-} (sulphate)	max. 150 mg/l
Fe (iron)	max. 0.1 mg/l
Electrical conductivity	min 20 µS/cm
Waste water drawer	
Maximum capacity 4.5l	
EMISSIONS	
Heat output	
Latent heat	1000 KJ/h
Sensible heat	1100 KJ/h
Noise during operation	max. 60 dBA
Spray guard	1Px4

MOFFAT

Australia
moffat.com.au

New Zealand
moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Ph 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Ph 02-8833 4111
nswsales@moffat.com.au

South Australia
Ph 03-9518 3888
vsales@moffat.com.au

Queensland
Ph 07-3630 8600
qldsales@moffat.com.au

Western Australia
Ph 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Ph +64 9-574 3150
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.CON.S.1702

24:7 Service Support