Electrolux

Modular Cooking Range Line thermaline 90 - 2 Zone Electric Solid Top with Ecotop, 1 Side

ITEM #

MODEL #

NAME #

SIS #

AIA #



Modular Cooking Range Line

thermaline 90 - 2 Zone Electric Solid Top with Ecotop, 1 Side

589003 (MCLBAAEOAO)	Electric solid top, 2 zones, ecotop coating, one-side operated

Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. ECOTOP model with a 14 mm thick mild steel cooking surface with heat retaining coating. 2 independently controlled heating zones with 2 electronic sensors per zone for temperature surface control and 8 power levels. Rapid plate heat up, continuously ready to use. Overheat protection switches off the supply in case of overheating. Standby function saves energy and quickly recovers maximum power. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.
IPX5 water resistance certification.
Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- 2 heating zones independently controlled.
- Rapid heat up of the plate and continuously ready for use.
- Overheat protection: a temperature sensor switches off the supply in case of overheating.
- Pans can easily be moved from one area to another without lifting.
- Wide rounded cleaning zone around the plates for easier cleaning.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic silicon "soft" grip for easier handling and cleaning. The special design of the controls prevent infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Standby function for energy saving and fast recovery of maximum power.
- Cooking plate and base joint profile guarantee against soil infiltration.
- Two electronic sensors per zone to control surface temperature and to protect cooking plate from overheating.
- 8 power levels.
- ECOTOP model has a 14mm thick mild steel cooking surface with heat retaining coating.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.

APPROVAL:

Electrolux

Modular Cooking Range Line
thermaline 90 - 2 Zone Electric Solid Top with Ecotop, 1 Side

Optional Accessories

- Connecting rail kit, 900mm — PNC 912502 ❑
- Portioning shelf, 500mm width — PNC 912523 ❑
- Portioning shelf, 500mm width — PNC 912553 ❑
- Folding shelf, 300x900mm — PNC 912581 ❑
- Folding shelf, 400x900mm — PNC 912582 ❑
- Fixed side shelf, 200x900mm — PNC 912589 ❑
- Fixed side shelf, 300x900mm — PNC 912590 ❑
- Fixed side shelf, 400x900mm — PNC 912591 ❑
- Connecting rail kit, right — PNC 912975 ❑
- Connecting rail kit, left — PNC 912976 ❑
- Endrail kit, flush-fitting, left — PNC 913111 ❑
- Endrail kit, flush-fitting, right — PNC 913112 ❑
- Endrail kit (12mm) for thermaline 90 units, left — PNC 913202 ❑
- Endrail kit (12mm) for thermaline 90 units, right — PNC 913203 ❑
- T-connection rail for back to back installations without backsplash — PNC 913227 ❑
- - NOT TRANSLATED - — PNC 913232 ❑
- - NOT TRANSLATED - — PNC 913244 ❑
- - NOT TRANSLATED - — PNC 913251 ❑
- - NOT TRANSLATED - — PNC 913252 ❑
- - NOT TRANSLATED - — PNC 913255 ❑
- - NOT TRANSLATED - — PNC 913256 ❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Modular Cooking Range Line
thermaline 90 - 2 Zone Electric Solid Top with Ecotop, 1 Side

Front

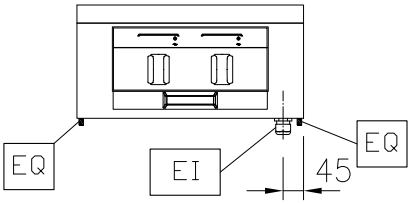

Top

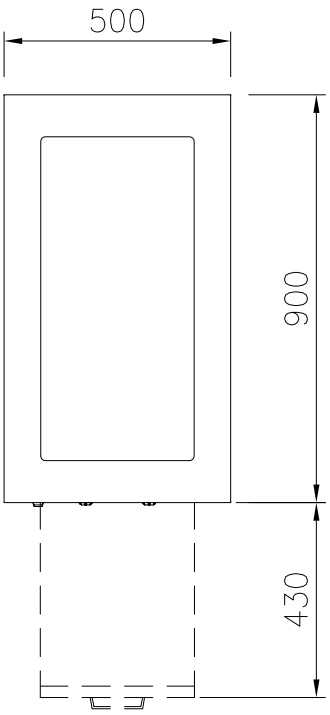

EI = Electrical connection
EQ = Equipotential screw

Side

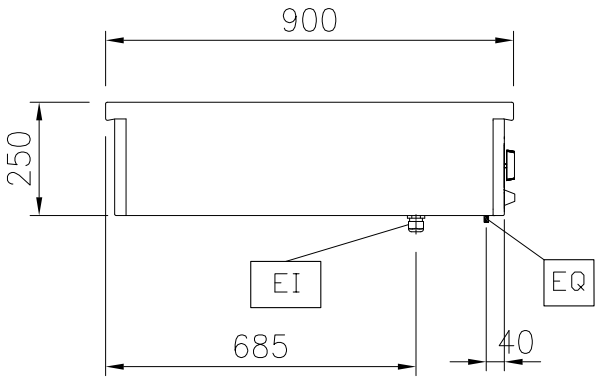

Electric

Supply voltage:	
589003 (MCLBAAEOAO)	400 V/3N ph/50/60 Hz
Total Watts:	6 kW

Key Information

Configuration:	One-Side Operated;Top
Front Plates Power:	3 - 0 kW
Back Plates Power:	3 - kW
Solid top usable surface (width):	360 mm
Solid top usable surface (depth):	730 mm
External dimensions, Height	250 mm
External dimensions, Width	500 mm
External dimensions, Depth	900 mm
Net weight:	75 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2015.06.26