



Electrolux

Stainless Steel Preparation 1600 mm Hot Cupboard with Upstand

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Electrolux

Stainless Steel Preparation
1600 mm Hot Cupboard with Upstand



Stainless Steel Preparation

1600 mm Hot Cupboard with Upstand

133025 (MSR1617)

Hot cupboard, with 100mm
upstand, 1600mm

Short Form Specification

Item No.

Made entirely from stainless steel. Inner welded frame in stainless steel. Unique connection of panels to inner frame. Worktop in 304 AISI stainless steel (40mm high) incorporates a layer of sound deadening material and has upturned edges. Upstand (h=100mm) with 8mm rounded edge. Sound-deadened sliding doors. Handles are formed by a fold in the sliding doors. Height-adjustable intermediate shelf with riveted corners and transversal reinforcement in stainless steel. Ventilated hot air flow system guarantees temperature evenness, air flows underneath the intermediate shelf and throughout the cabinet. Thermostat with digital display to adjust the internal temperature (up to 75°C). Mounted on feet, adjustable in height.

Main Features

- Model complies with international hygiene and cleanability standards.
- Digital display thermostat to adjust internal temperature up to 75°C.

Construction


- 40 mm worktop in 304 AISI stainless steel.
- Under panel and upturned edges for added protection.
- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Handles directly built into the sliding doors.
- Reinforced base panel in stainless steel.
- Equipped with intermediate shelf which can be positioned at three different heights.
- Intermediate shelf in stainless steel with riveted corners and transversal reinforcement in stainless steel.
- Sturdy sound-deadened sliding doors on tracks located flush to the front of the frame.
- Easy access to the cupboard interior on all lengths guaranteed by the use of only 2 doors.
- 304 AISI stainless steel feet, 150 mm high and 52 mm in diameter, adjustable by -10/+40 mm.
- 100 mm high upstand with 8 mm rounded corners and upturned edges.
- Constructed entirely in stainless steel to offer maximum durability.

Optional Accessories


- Set of 4 wheels (2 with brake) d. PNC 125mm for cupboards 855880 ☐

APPROVAL: _____

Front

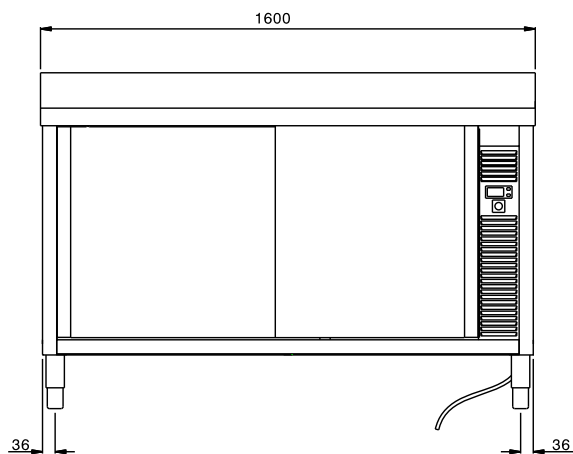


Top

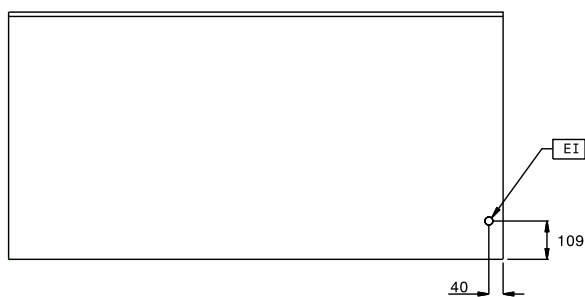

EI = Electrical connection

Side

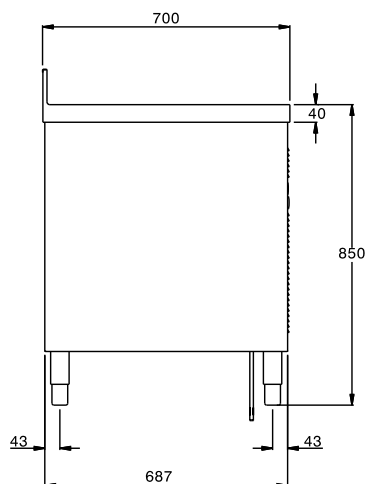

Electric

Supply voltage:

133025 (MSR1617)

220/240 V/1N ph/50/60 Hz

Total Watts:

2.4 kW

Key Information:

Cabinet width: 1395 mm

Cabinet depth: 645 mm

Cabinet height: 595 mm

Cabinet temperature: 50-75 °C

External dimensions, Height: 950 mm

External dimensions, Width: 1600 mm

External dimensions, Depth: 700 mm

Upstand Dimensions, Height: 100 mm

Upstand Dimensions, Depth: 13 mm

Upstand Dimensions, Radius: R=8

Worktop thickness: 40 mm

Net weight: 65 kg