HENKOVAC
QUALITY VACUUM SYSTEMS



MOBILE M7, M8

SEAL CONFIGURATIONS M7 & M8

M7



M8 options:

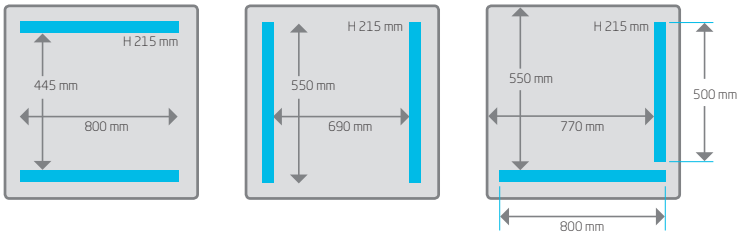

SPECIFICATIONS M7 & M8

ALUMINUM COVER & CHAMBER

	SEAL LENGTH	MAX. PRODUCT HEIGHT	USEFUL CHAMBER SIZE (WxDxH)	OUTSIDE DIMENSION (WxDxH)	STANDARD VOLTAGE*	POWER CONSUMPTION	WEIGHT
M7	500	175	500 x 500 x 175	695 x 680 x 1035	400-3-50 Hz	3,3 kW	150 kg
M8	2 x 800 2 x 550 800 x 500	215	max 800 x 500 x 215	905 x 755 x 1060	400-3-50 Hz	3,5 kW	200 kg

*Dimensions in mm *Machines can be supplied with all world wide voltages applicable*

OPTIONS M7 & M8

	DIGITAL TIME CONTROL	SENSOR CONTROL	SEAL	SEAL CONFIGURATION	GAS	PUMP CAPACITY M³	CYCLE TIME
M7	10 programs	sensor/H2O	Double/CC/CCC/2S**	S&S	gas	40 or 63 m³	25-35 sec
M8	10 programs	sensor/H2O	Double/CC/CCC/2S	L&L S&S L&S	gas	63 or 100 m³	20-40 sec

**CC = Clean Cut, CCC = Clean Cut Controlled, 2S = Two Sides*