NW 508

Modular Ice Machine up to 240 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW L 508
Large Cube 12 g
W 29 x D 22 x H 29 mm



NW 508
Full Cube 10 g
W 22 x D 22 x H 22 mm



NW H 508
Half Cube 6 g
W 10,5 x D 22 x H 29 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 508	✔	**SB193**	129
	✔	**SB322**	168
	CBT30EMCD	**SB393**	181
	CBT30EMCD	**SB530**	243

LEGEND:
✔ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxxxx : need additional bin top

Certifications:

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	35°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store
DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 240 kg

3 April 2018

NW 508

Modular Ice Machine up to 240 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	

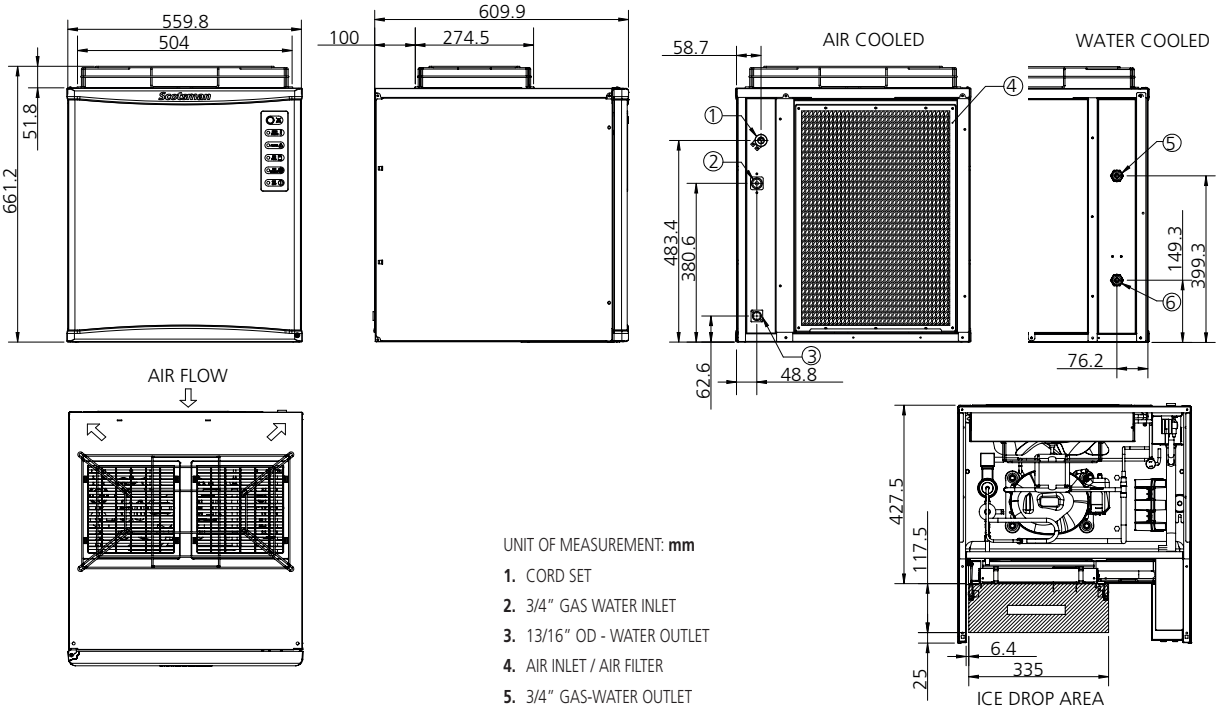

UNIT OF MEASUREMENT: **mm**

1. CORD SET
2. 3/4" GAS WATER INLET
3. 13/16" OD - WATER OUTLET
4. AIR INLET / AIR FILTER
5. 3/4" GAS-WATER OUTLET
6. 3/4" GAS-WATER INLET
   WATER COOLED UNIT ONLY

UNIT DATA

Size (W x D x H)	558 x 610 x 609 mm
Net weight	67 kg

SHIPPING DATA

Carton (W x D x H)	620 x 680 x 800 mm
Weight	77 kg

			Compressor		Circuit wires		Max. fuse size
Version	**Voltage**		**Btu/h**	**W**	**No.**	**Ømm²**	**A**
NW 508 AS	230/50/1		8872	2600	3	1.5	16
NW 508 WS	230/50/1						
NW 508 AS	230/50/1						
NW 508 WS	230/50/1						
NW 508 AS	230/50/1						
NW 508 WS	230/50/1						

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	**Condensation**	**Voltage**	**10°C/10°C**	**21°C/10°C**	**32°C/21°C**	**kWh/100 kg**	**kWh/24h**	**l/h**	**W**
NW 508 AS	Air	230/50/1	240	220	160	29.9	23.3	10.1	1200
NW 508 WS	Water	230/50/1							
NW 508 AS	Air	230/50/1							
NW 508 WS	Water	230/50/1							
NW 508 AS	Air	230/50/1							
NW 508 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Modular Ice Machine up to 240 kg