NW1008

NW Series Modular Cube Ice Maker

NW308 | NW458 | NW508 | NW608 | NW1008





Vertical Cube System



T304 Stainless Steel Panels



Proximity Condensor Air Filter

- RESET
- HIGH PRESSURE
- ALARM
- BIN FULL
- ICE MAKING
- ON/ OFF



Auto-alert Indicator Lights



Air and Water Cooled
Condensor Options



Double Stack
(Needs a stacking kit sold separately)

24 Hour Volume Production

Air Cooled			Water Cooled		
70°F/21°C 50°F/10°C lb/kg	Air Water	AHRI 90°F/32°C 70°F/21°C lb/kg	70°F/21°C 50°F/10°C lb/kg	Air Water	AHRI 90°F/32°C 70°F/21°C lb/kg
1003/456		803/365	979/445		869/395

Cube Ice



Full Cube - 12g
(26.5 x 26.5 x 26 mm)

Half Cube - 6g
(13 x 26.5 x 26 mm)

Modular Bin Options

NB 530



Storage Capacity: 243kg

NB 948



Storage Capacity: 406kg

CE

CERTIFIED ISO 9001:2008

www.scotsman-ice.it
www.scotsman-china.com

Scotsman Ice Systems

10/2016

Dimension

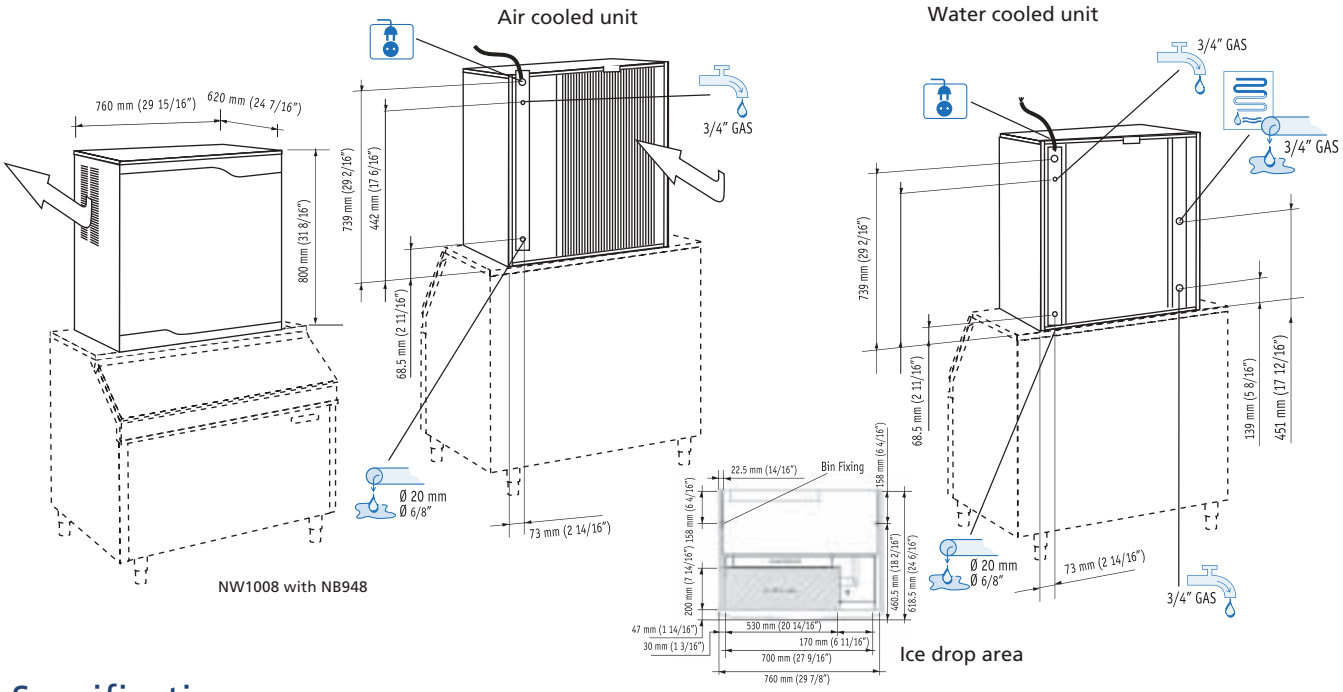

Specifications

	+C° -C°	[Btu/h]	[W]	[Ømm²]	[V/Hz/Ph]	[W]	FUSE	[kwh/100kg] 32°C 90°F 21°C 70°F	[L/100kg] 32°C 90°F 21°C 70°F	[kg]	[lb]	[kg]	[lb]
NW1008 AS		24900	7300	3 x 2,5	220/50/1	2500	30 A	13,1	142	104	228	122	268
NWH1008 AS		24900	7300	3 x 2,5	220/50/1	2500	30 A	13,1	142	104	228	122	268
NW1008 AS		24900	7300	5 x 2,5	**380/50/3**	2500	10 A	13,1	142	104	228	122	268
NW1008 WS		24900	7300	5 x 2,5	**380/50/3**	2100	10 A	12,1	1045	100	220	110	243
NWH1008 AS		24900	7300	5 x 2,5	**380/50/3**	2500	10 A	13,1	142	104	228	122	268
NWH1008 WS		24900	7300	5 x 2,5	**380/50/3**	2100	10 A	12,1	1045	100	220	110	243

Performance Table

NW1008 AS
NWH1008 AS

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	485	472	457	430	kg
50°	1067	1038	1005	946	lb
21°	456	445	432	408	kg
70°	1003	979	950	897	lb
32°	390	378	365	340	kg
90°	858	831	803	748	lb
38°	330	322	315	300	kg
100	726	708	693	660	lb

24h

NW1008 WS
NWH1008 WS

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	450	435	410	375	kg
50°	990	957	902	825	lb
21°	445	430	405	370	kg
70°	979	946	891	814	lb
32°	435	420	395	365	kg
90°	957	924	869	803	lb
38°	415	405	380	355	kg
100	913	891	836	781	lb

24h

Operating Range

	Minimum	Maximum
	10°C (50°F)	40°C (103°F)
	5°C (41°F)	35°C (95°F)
V	-10%	+10%
	1 BAR 14 psi	5 BAR 70 psi

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-china.com

Scotsman Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg

10/2016