Electrolux

Ice Cuber 90kg/24h with 55kg bin - Air cooled

ITEM #

MODEL #

NAME #

SIS #

AIA #



Ice Cuber

90kg/24h with 55kg bin - Air cooled

730529 (FGC90A)	Ice maker, cube, 90 kg/24h, self-contained, 16kg ice collection bin included, air - cooled
730163 (FGC90A42)	Ice maker, 42gr cube, 90kg/24h, 55kg ice collection bin included, air-cooled

Short Form Specification

Item No.

Plastic flap on the front, top and sides in 304 AISI stainless steel. The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to remove, permit a simple flow and prevent limestone formation. R404a refrigerant. Air cooled. Container capacity Kg: 55

Main Features

- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.

Construction


- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Refrigerant type: R404a.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Adjustable feet 110-150 mm.

APPROVAL:


Electrolux
90kg/24h with 55kg bin - Air cooled
Ice Cuber

Ice Cuber
90kg/24h with 55kg bin - Air cooled

Front

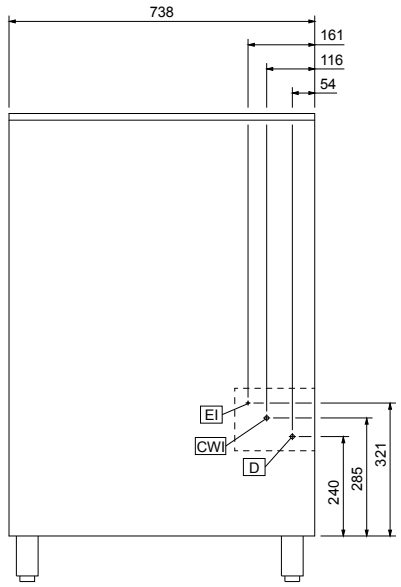


Top

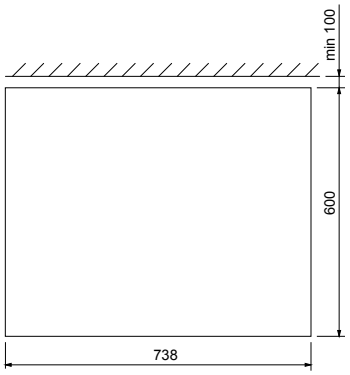

CWI1 = Cold Water inlet 1
D = Drain
EI = Electrical connection

Side

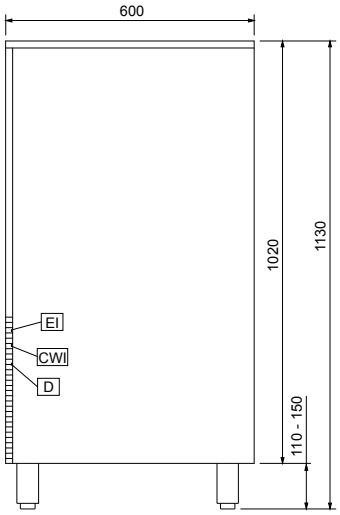

Electric

Supply voltage:	
730529 (FGC90A)	220-240 V/1N ph/50 Hz
730163 (FGC90A42)	220-240 V/1N ph/50 Hz
Electrical power:	0.85 kW

Capacity:

Bin capacity:	55 kg

Key Information:

External dimensions, Height:	1130 mm
External dimensions, Width:	738 mm
External dimensions, Depth:	600 mm
Net weight:	89 kg
Output:	90 kg/day
Kind of cube:	
730529 (FGC90A)	Ice Cube 18 g
730163 (FGC90A42)	Ice Cube 42 g

Refrigeration Data

Refrigerant type:	R404a

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.03.01