Electrolux

Digital Cabinets
400lt Line Freezer, 1 Door (White)

ITEM #

MODEL #

NAME #

SIS #

AIA #



730193 (R04FSFW)	1-door freezer 400lt, -15-24° C, prepainted white

Short Form Specification

Item No.

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R404a refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

APPROVAL:

Main Features

- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopenthane).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

Optional Accessories


- Pvc container with false bottom for 400lt — PNC 881072 ❑
- Printer for HACCP basic version (for cabinets and counters with digital control) — PNC 881457 ❑

Electrolux Professional
www.professional.electrolux.com
professional@electrolux.com


Electrolux
Digital Cabinets
400lt Line Freezer, 1 Door (White)

Digital Cabinets
400lt Line Freezer, 1 Door (White)

Front

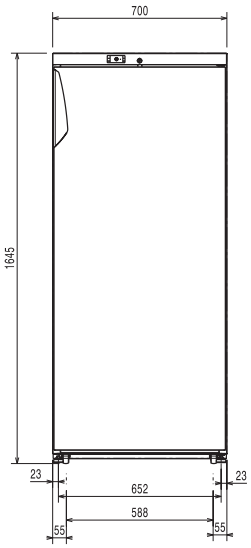


Side

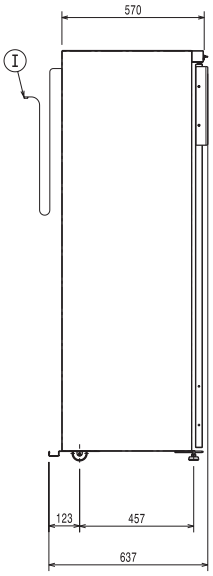

EI = Electrical inlet (power)
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top



Electric

Supply voltage:	
730193 (R04FSFW)	230 V/1 ph/50 Hz
Electrical power max.:	0.8 kW

Key Information:

Gross capacity:	400 lt
Net Volume:	
Door hinges:	Right Side
External dimensions, Width:	700 mm
External dimensions, Height:	1645 mm
External dimensions, Depth with Doors Open:	1310 mm
Noise level:	56 dBA
Number and type of grids (included):	- ;600x400
Type of external material:	Prepainted Steel
External door material:	Prepainted Steel

Refrigeration Data

Control type:	Digital
Compressor power:	1/2 hp
Refrigerant type:	R404a
Refrigeration power:	780 W
Refrigeration power at evaporation temperature:	-29 °C
Refrigerant weight:	240 g
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static
Cooling unit:	Built-In
Defrost type:	Manual

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2017.11.15