HENKOVAC TABLE TOPS:

BEST CHOICE FOR RESTAURANTS, HOSPITALITY INDUSTRY, FOOD VENDORS AND CATERERS.

Our 4 table top machines have all the quality engineering and build of our industrial vacuum machines.

"PLUG & PLAY"



TABLE TOP RANGE
T2, T3, T4



Liquid insert plate



CABINET FOR
T2, T3 & T4

SPECIFICATIONS TABLE TOPS

Transparant cover & stainless steel chamber

	SEAL LENGTH	MAX. PRODUCT HEIGHT	USEFUL CHAMBER SIZE (WxDxH)	OUTSIDE DIMENSION (WxDxH)	STANDARD VOLTAGE*	POWER CONSUMPTION	WEIGHT
TABLE TOP **T2**	270	100	270 x 310 x 100/140**	365 x 500 x 300/340**	230-1-50 Hz	0,4/0,5 kw	25 kg
TABLE TOP **T3**	320	160	320 x 330 x 160	430 x 550 x 410	230-1-50 Hz	0,5/0,7 kw	50 kg
TABLE TOP **T4**	420	180	max. 420 x 370 x 180	530 x 590 x 460	230-1-50 Hz	0,7/1,3 kw	60 kg
TABLE TOP **T5**	320	95	800 x 320 x 95	985 x 515 x 430	230-1-50 Hz	1,3 kw	115 kg

*Dimensions in mm *Machines can be supplied with all world wide voltages applicable*

OPTIONS TABLE TOPS

	DIGITAL TIME CONTROL	SENSOR CONTROL	SEAL	SEAL CONFIGURATION	GAS	PUMP CAPACITY M³	CYCLE TIME
TABLE TOP **T2****	1 program	x	Single	L	x	4 or 8 m³	20-40 sec
TABLE TOP **T3**	1 or 10 programs	sensor/H_2O	Double/CC***	L	gas	8 or 16 m³	20-30 sec
TABLE TOP **T4**	1 or 10 programs	sensor/H_2O	Double/CC***	L L&L	gas	16 or 21 m³	20-30 sec
TABLE TOP **T5**	1 or 10 programs	sensor/H_2O	Double/CC***	S&S	gas	21 m³	20-30 sec

Model T2 standard coverheight 100 mm, optional cover 140 mm height* * CC = Clean Cut, (Clean Cut)*

SPECIFICATIONS CABINET

CABINET	DIMENSIONS (WxDxH)	FOR TABLE TOP
PLUS-1	450 x 550 x 620	T2 & T3
PLUS-2	540 x 590 x 580	T4

SEAL CONFIGURATIONS TABLE TOPS

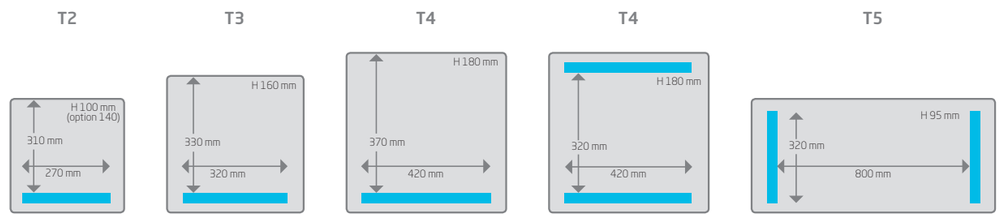

Dimensions in mm